



Roca

Avalon

Avalon

Elegance in essence. A distinctive fusion of stone textures and advanced technology in a floor-to-wall format for extraordinary porcelain tiles. Avalon is an exceptional fusion of stone textures, combined in a unique way.



Avalon Suite Arena 12"x36" R

Glazed Porcelain

24"x24" R, 12"x36" R

Avalon

Glazed Porcelain


7-9 mm |  | 12"x24" R 12"x36" R
30x60 cm 30x90 cm



Blanco




24"x24" R
F100B60011

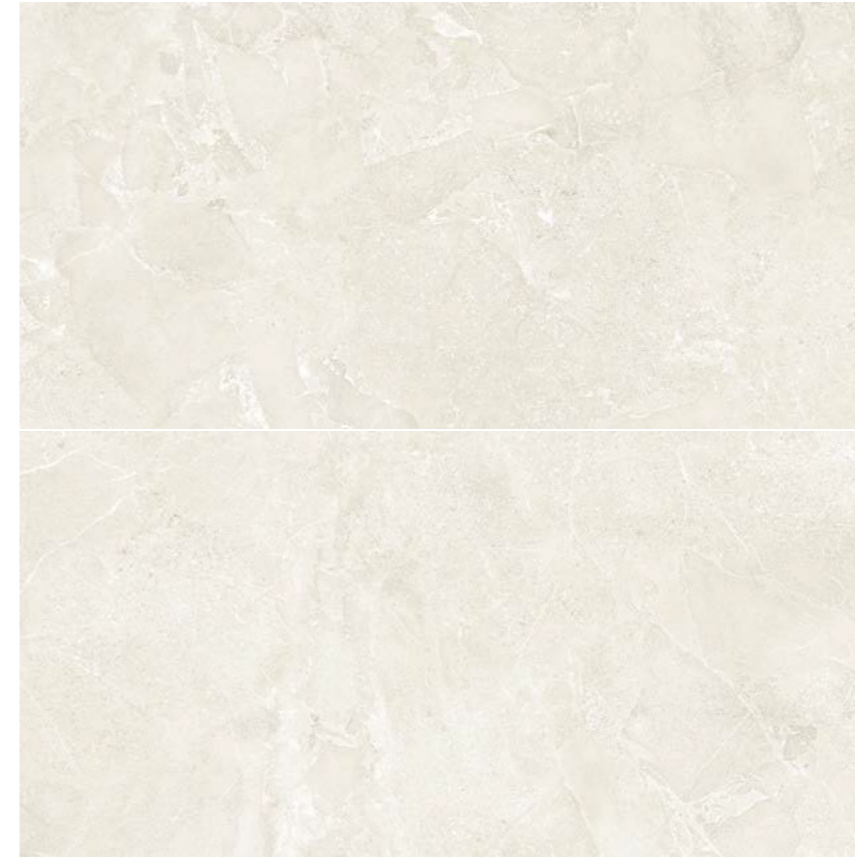

Arena




24"x24" R
F100B60371

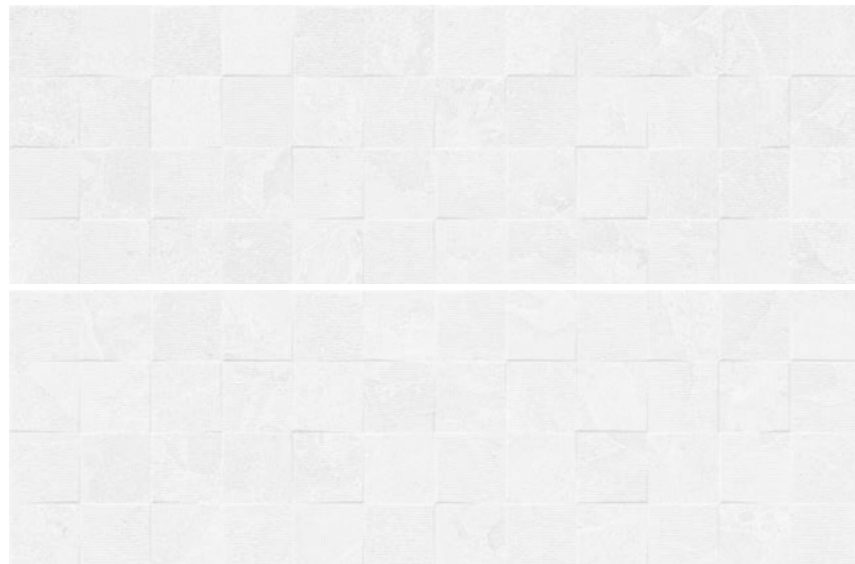

Suite Blanco



12"x36" R
F10B2AW011

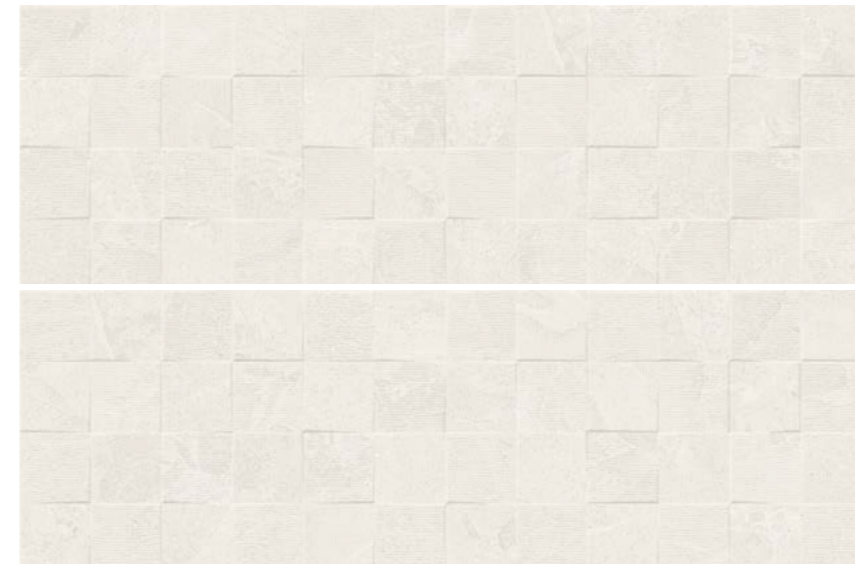

Suite Arena



12"x36" R
F10A1AW371

Avalon

Glazed Porcelain

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 350
Scratch Hardness	MOH's Scale	6
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
PEI - Glazed Tiles	C1027	5
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.50
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warping	C485	Pass
Wedging	C502	Pass

Technical Specifications (Suite)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>=10%
Break Strength	C648	Min. 250
Scratch Hardness	MOH's Scale	-
Chemical Resistance	C650	Unaffected
Group	SEE FAQS	4
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warping	C485	Pass
Wedging	C502	Pass

Packaging Information


Size	SF per carton	PC per carton	BX per pallet
24"x24" R	15.50	4	30

Packaging Information

Size	SF per carton	PC per carton	BX per pallet
12"x36" R	14.53	5	51

Pavers Avalon


Color Body Porcelain Stoneware



24"x36" R
60x90 cm




Avalon Rock Blanco



24"x36" R
FIO237U011



Avalon Rock Arena



24"x36" R
FIO237U371



Pavers Avalon Blanco 24"x36" R

Pavers Avalon

Color Body Porcelain Stoneware

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	≤ 0.5
Break Strength	C648	Min. 2800
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistant	C1378	Class A
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
PEI Glazed Tiles	C1027	4
Dynamic Coefficient of Friction (DCOF)	A137.1	≥ 0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warping	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
24"x36" R	7.80	1	40