



Roca

Lithology

Astoria

An abstract proposal away from classic white marbles. Ideal for minimalist spaces, reinvented from an Antique stone to a contemporary look by using neutral soft tones.



Astoria Gray 12"x24"

Porcelain Tile

◇ ≡ 12"x24"



Astoria Gray 12"x24"



Astoria Gray 12"x24"



Astoria Gray 12"x24"

Astoria

Porcelain Tile


12"x24"
 300x600 cm



Gray



12"x24"
 UASTOFD16BI

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Other Faces



Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

Basalt

The beautiful interpretation of volcanic rock presents an interesting proposal in the matte finish of a sober, neutral, and minimalist stone.




Basalt 12"x24"

Porcelain Tile

◇ ≡ 12"x24"



Basalt Gray 12"x24" & Basalt Graphite 12"x24"

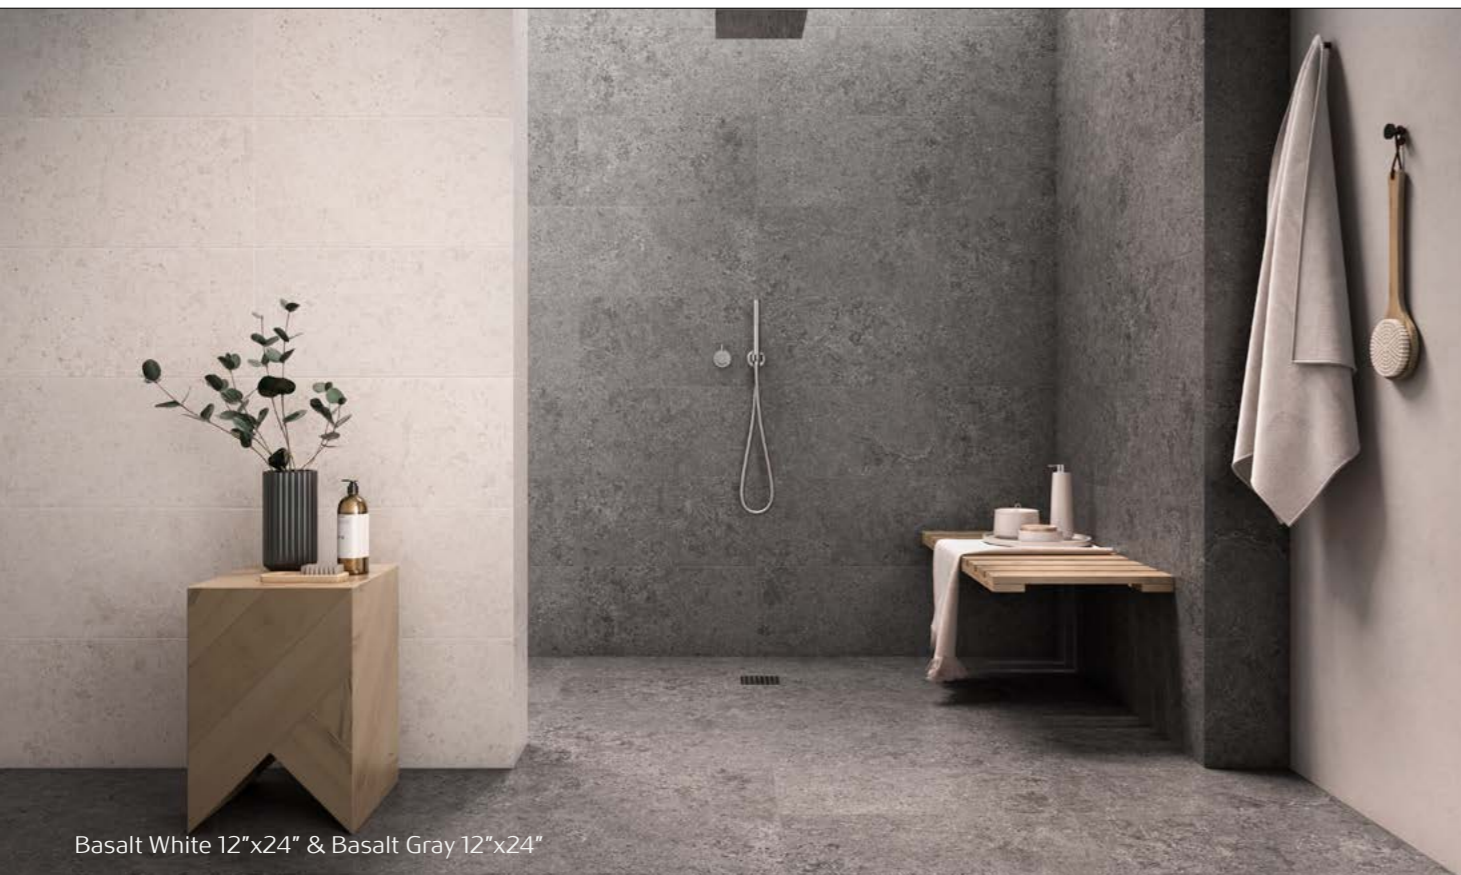

Basalt White 12"x24" & Basalt Gray 12"x24"



Basalt White 12"x24", Basalt Gray 12"x24" & Basalt Graphite 12"x24"

Basalt

Porcelain Tile

8.5 mm |  | 12"x24"
300x600 cm




White



12"x24"
UBASALT16BU

Other Faces

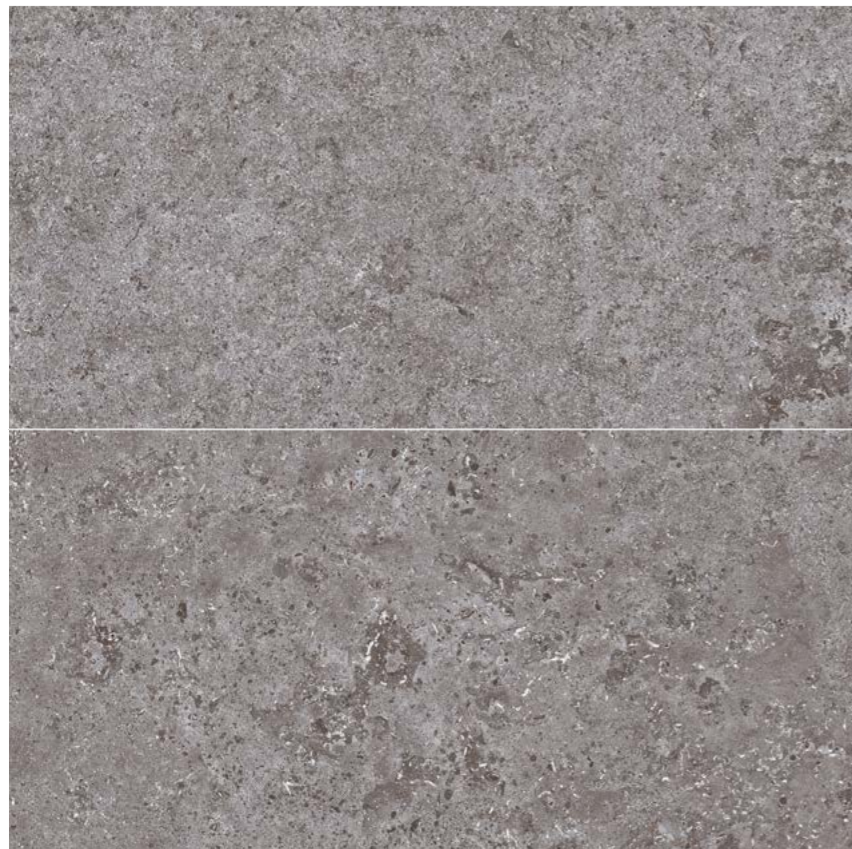

Gray




12"x24"
UBASALT16BI




Basalt

Porcelain Tile


12"x24"
 300x600 cm

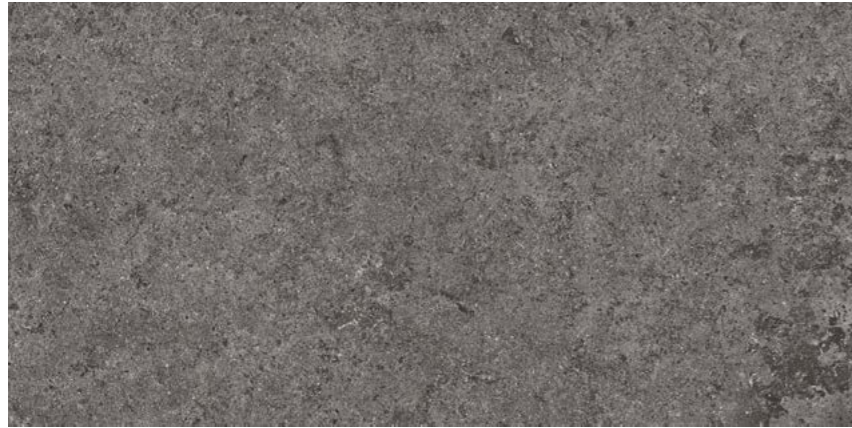

Graphite


12"x24"
 UBASALT16BW

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Other Faces



Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

Empire

The continuous search for natural matter and color palettes results in the classic Travertino crosscut look. A concept inspired by the rawness of the marble, preserving the original tone variation and direction of the veining.



Empire Beige 12"x24"

Porcelain Tile

◇ ≡ 12"x24"


Empire

Porcelain Tile


12"x24"
 300x600 cm



Beige


12"x24"
 UEMPIRP16BE

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Other Faces



Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32



Ibiza

The essence of Invisible Grey, the new IT Stone, is a White marble with strong veins that achieve a beautiful composition of contrasts. Along with the carving effect, a low relief that matches perfectly with each vein by digital decoration, this material accomplishes an extremely natural look.

Porcelain Tile

◇ ≡ 12"x24"

Ibiza White 12"x24"



Ibiza White 12"x24"



Ibiza White 12"x24"



Ibiza White 12"x24"



Ibiza

Porcelain Tile

8.5 mm | 12"x24"
 300x600 cm



White




12"x24"
 UIBIZAF16BV

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Other Faces

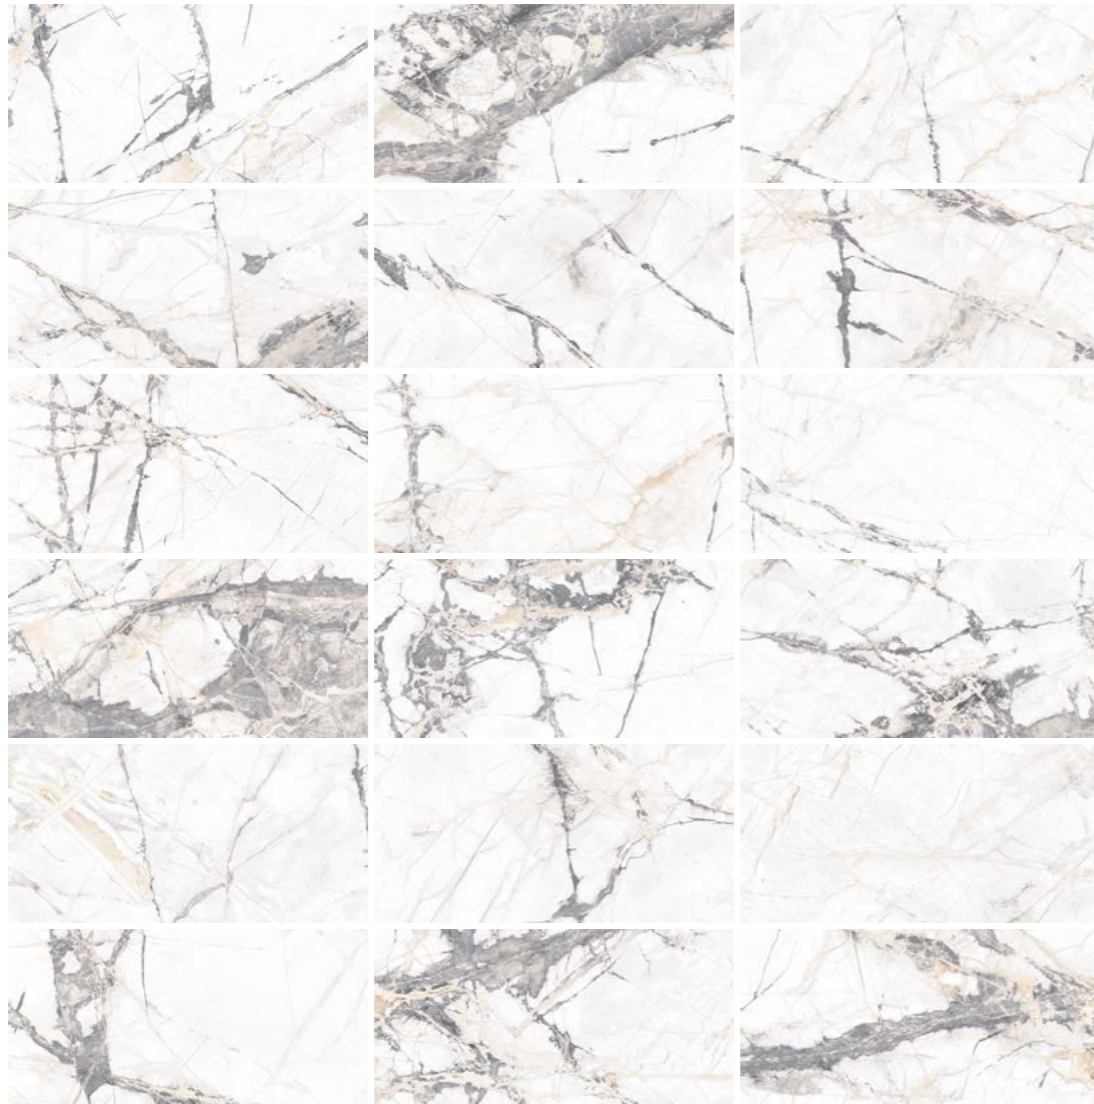

Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

Moscato

Inspired in the all-time favorite Crema Marfil, updated into a seamless pattern with gold and sand undertones. Emphasized by the carving in the veining, to bring more authenticity to the marble.



Moscato Sand 12"x24"

Porcelain Tile

◇ ≡ 12"x24"


Moscato

Porcelain Tile

8.5 mm |  | 12"x24"
300x600 cm



Sand



12"x24"
UMOSCAT16BU

Other Faces



Taupe



12"x24"
UMOSCAT16BG



Moscato

Porcelain Tile

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warping	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton	Bx per palette
12"x24"	17.44	9	32



Moscato Taupe 12"x24"

Polaris

Inspiration is brought from the Italian north region, where Calacata Gold is originated from. A natural marble whose elegance is emphasized by its particular veining and the subtle combination of light grey and golden tones.



Polaris White 12"x24"

Porcelain Tile

◇ 12"x24"

Polaris

Porcelain Tile


12"x24"
 300x600 cm



White



12"x24"
 UPOLAR116BV

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Other Faces



Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

Sandstone

An original blend between two stones brings to life this beautiful material, whose charm is found in the richness in textures resulting from the mix of thin veining and soft degraded.



Sandstone White 12"x24"

Porcelain Tile

◇ 12"x24"



Sandstone White 12"x24"



Sandstone White 12"x24"



Sandstone Beige 12"x24"

Sandstone

Porcelain Tile


12"x24"
 300x600 cm



White



12"x24"
 USANDST16BV



Beige



12"x24"
 USANDST16BE


Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

Other Faces

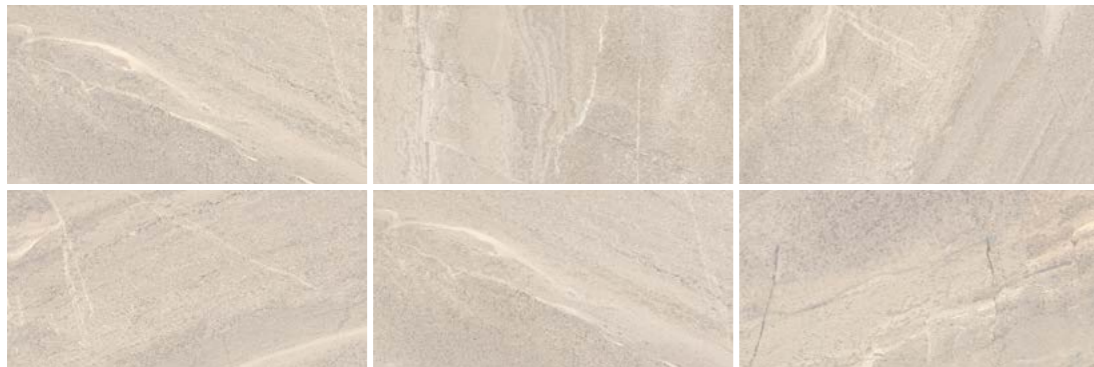



Vesta

A new interpretation of the Travertino marble, calls for the spotlight. Accomplish a visual and tactile impact by its organic movement, and diverse multitone, combined with the low relief carving effect.

Vesta White 12"x24"

Porcelain Tile

◇ ≡ 12"x24"



Vesta White 12"x24"



Vesta Sand 12"x24"



Vesta Silver 12"x24"

Vesta

Porcelain Tile

8.5 mm |  | **12"x24"**
300x600 cm



White



12"x24"
UVESTAF16BV

Other Faces



Silver



12"x24"
UVESTAF16BI



Vesta

Porcelain Tile


8.5 mm |  | 12"x24"
300x600 cm



Sand



12"x24"
UVESTAF16BE

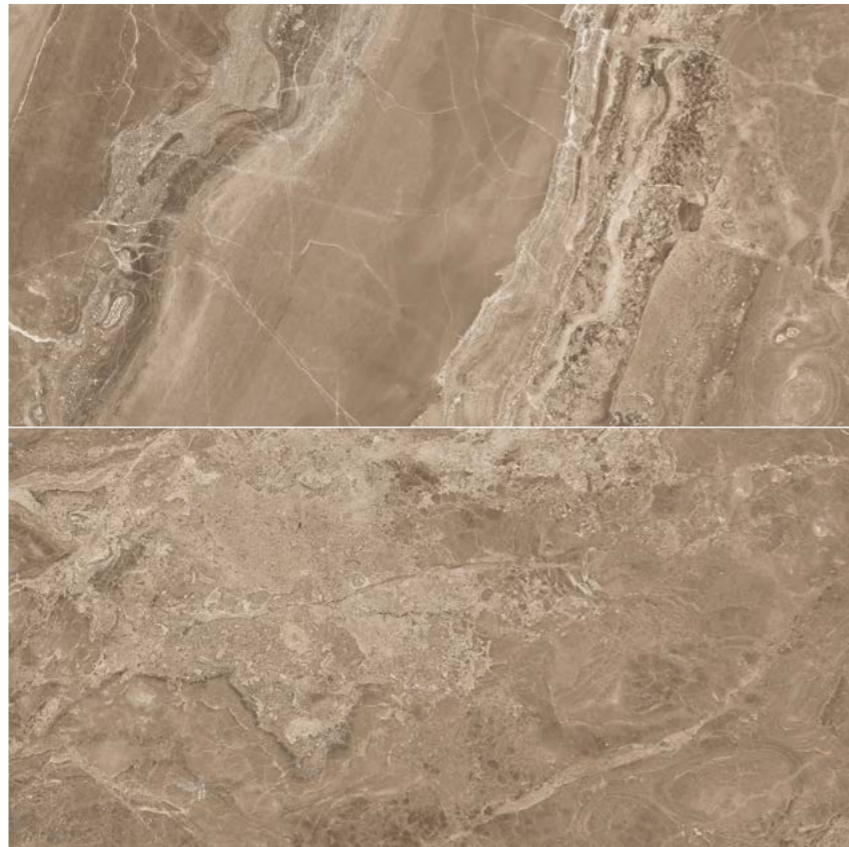

Taupe



12"x24"
UVESTAF16BG

Other Faces



Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

The Roca logo is displayed in white on a black rectangular background. The word "Roca" is written in a bold, sans-serif font. Below the letters "o" and "c" is a stylized white wave graphic that underlines the text.

Roca Tile USA Inc.

11190 NW 25th St.
Miami, FL 33172

(800) 321 0684

www.rocatileusa.com