



Roca

Weston



Weston

A Mesmerizing Hybrid of Marble's Elegance and Stone's Strength. Experience a unique textural journey, elevating spaces with timeless sophistication.

Ceramic Floor

◇ 12"x24" - 17"x17" - 13"x13"

Weston

Ceramic Floor



12"x24"
30x60 cm

17"x17"
44x44 cm

13"x13"
33x33 cm



White




17"x17"
UWESTON13CV




12"x24"
UWESTON16BV



13"x13"
UWESTON13CV

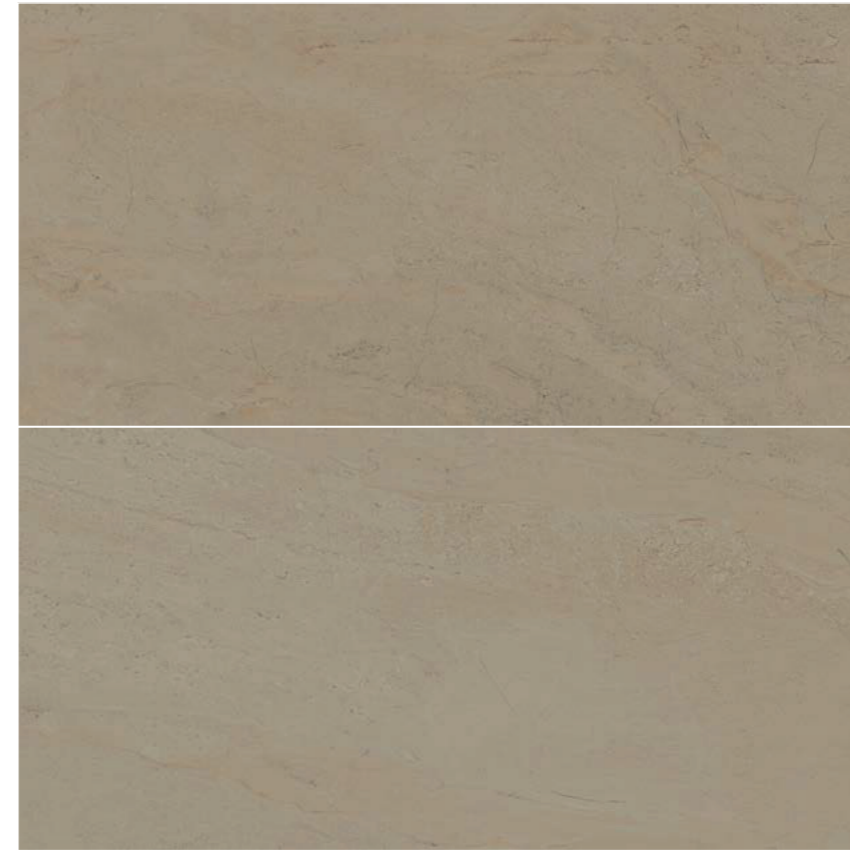

Brown



17"x17"
UWESTON14HG



12"x24"
UWESTON16BG




13"x13"
UWESTON13CG



Beige



17"x17"
UWESTON14HE



12"x24"
UWESTON16BE



13"x13"
UWESTON13CE



Grey



17"x17"
UWESTON14HI



12"x24"
UWESTON16BI



13"x13"
UWESTON13CI

Weston

Ceramic Floor

Technical Specifications

| CHARACTERISTICS | STANDARD | DECLARED ASTM |
|--|-----------------|----------------------|
| Water Absorption | C373 | 3%<wa<7% |
| Break Strength | C648 | Min. 250 |
| Scratch Hardness | MOH's Scale | - |
| Chemical Resistance | C650 | Unaffected |
| Frost Resistance | C1026 | Not Resistant |
| Group | See FAQ's | 2 |
| Deep Abrasion - Unglazed Tiles | C1043 | N/A |
| PEI- Glazed Tiles*** | C1027 | 3 |
| Minimum Bond Strength (PSI) | C482 | 165 |
| Dynamic Coefficient of Friction (DCOF) | A137.1 | >=0.42 |
| Shade and Texture Rating | CTDA "V" | V2 |
| Facial Dimensions | C499 | Pass |
| Range of Thickness | C499 | Pass |
| Warpage | C485 | Pass |
| Wedging | C502 | Pass |

Packaging Information

| Size | SF per carton | PC per carton | BX per pallet |
|-------------|----------------------|----------------------|----------------------|
| 13"x13" | 16.47 | 14 | 72 |
| 12"x24" | 19.38 | 10 | 32 |
| 17"x17" | 16.58 | 8 | 48 |